



NAYAX Credit Card Reader

Super Star Installation Guide



Contents

Introduction.....	3
Materials included in Installation Package from Kiwikrane	3
Equipment a Franchisee needs to Supply	3
#1 – Assemble the NAYAX unit on its base with the cables threaded through the drilled hole.....	4
#2 – Remove the Front Machine Trunking Strip	4
#3 – Mount the NAYAX unit.	4
#4 Connect the meters to 12 Volt Wire.....	5
#5 Connect the meters to the Super Star.....	5
#6 Programming	6
#7 – Replace the front of machine Trunking Strip.....	6
#8 Attach the meters.....	6
#8 Test and ensure meters count correctly.....	6
#9 Set payout and advise Kiwikrane.....	6

Introduction

Welcome to the Kiwikrane Super Star NAYAX Installation Guide.

The information in the guide assumes you already have a working understanding of NAYAX and have already installed a NAYAX reader on a crane or vending machine.

Materials included in Installation Package from Kiwikrane


- NAYAX card reader
- NAYAX SideFit
- NAYAX yellow cable
- Base
- 4 Screws for the NAYAX Sidefit install to the base
- 2 Screws for the base installation
- 2 Meters
- 1 Crimp connector
- 2 Wire Cable Snap-In Connectors

Equipment a Franchisee needs to supply


To Install the NAYAX Unit a franchisee needs:

- Corded or cordless drill & 10mm drill bit
- Screw driver
- Black or white tape
- Marker pen or pencil
- Crimper

#1 – Turn off the machine and assemble the NAYAX unit on its base with the cables threaded through the drilled hole.

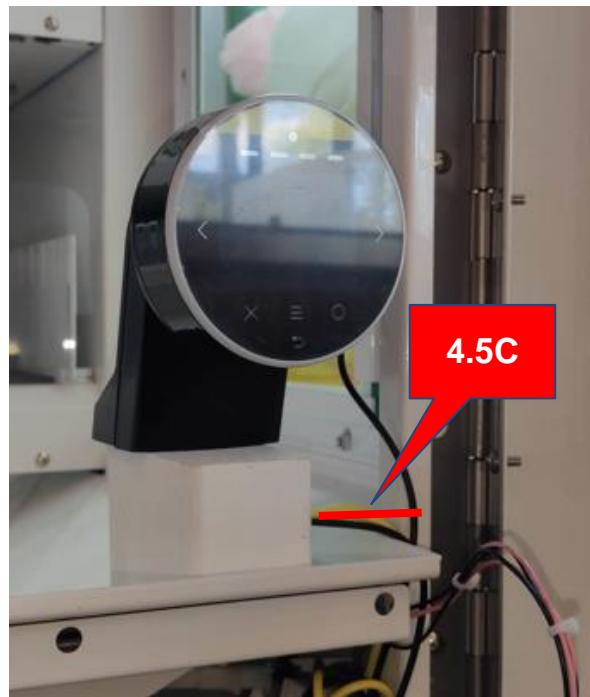

#2 – Remove the front of machine Trunking Strip

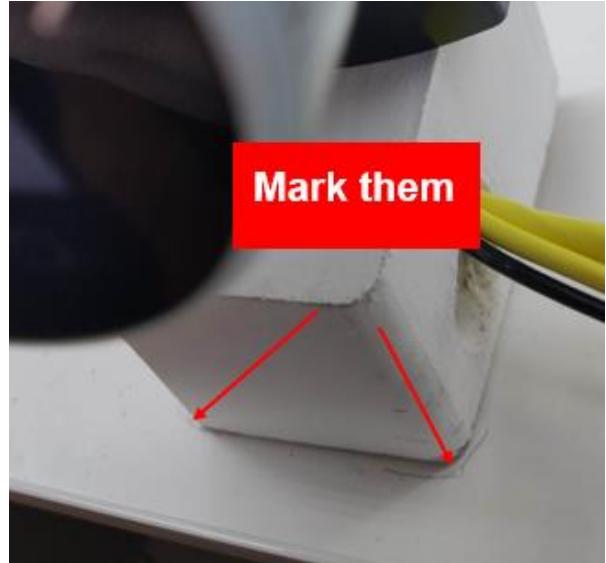

#3 – Mount the NAYAX unit

Step # 1 – Place the NAYAX unit on the right side of the door, approximately 4.5cm from the right of the machine.

Step # 2 – Use a pencil to mark the two front corner positions of the base.

Step # 3 - Remove the unit and drill two holes between the pencil lines making sure to avoid where the wires will be located.

Step # 4 – Use the provided screws to attach the base (screwing from the bottom through the holes).

#4 Connect the Meters to 12 Volt Wire

Step #1 – Locate and separate the meters.

Coin 1 NAYAX will be for the NAYAX reader and Coin 2 will be for the coin meter.

Each meter has two cables. Coin 1 NAYAX (red and black) and Coin 2 (pink and black).




Step #2 – Find the Note Reader Plug (Square) which has red, black and white wires.

Cut both the red wire and white wire on the Note Reader Plug (leaving enough wire so you can reconnect it again at some point in the future).

Step #3 – Connect the cut Note Reader red wire to the red and pink wires of the two new meters by crimping them.

NOTE: The picture below appears to only show one red and one pink, however there are two red and one pink wires in the crimp.

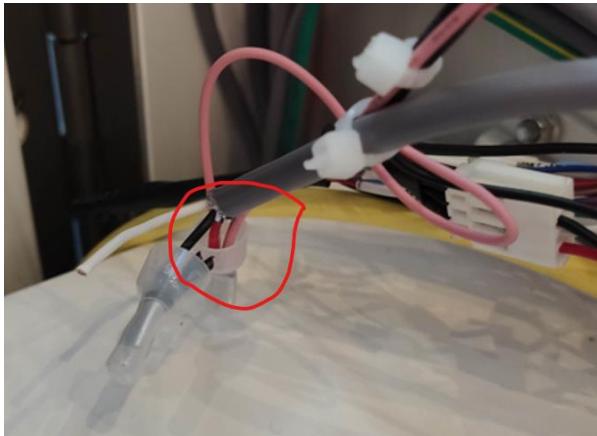

#5 Connect the meters to the Super Star


NOTE: Read this entire section before completing. You need to locate both the red and blue marked plug connectors and ensure you understand which goes to which before connecting.

Step #1 – Locate the **RED** 4 Pin Coin Mechanism Plug (with three wires red, black and white).

Step #2 – Using the purple crimps connect the black wire from Coin 1 NAYAX meter to the white wire from the **RED** 4 Pin Coin plug.

Step #3 – Connect the Yellow NAYAX cable to this coin mechanism plug.

NOTE: in the photo below you will see the red identifier on the righthand side.

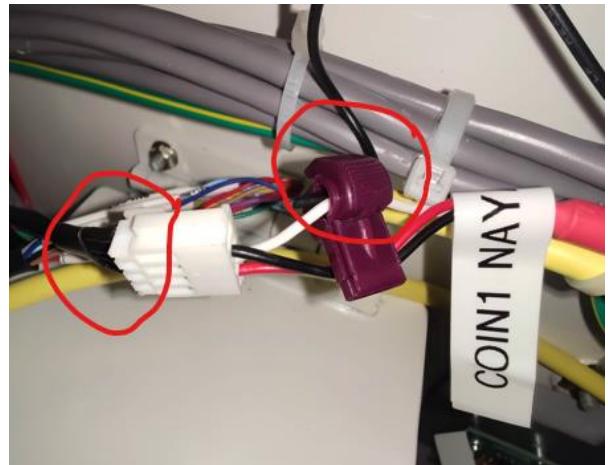

Step #4 - Locate the **BLUE** 4 Pin Coin Mechanism Plug connected to the ICT interface board (with three wires red, black and white).

Step #5 – Using the purple crimps, connect the black wire from Coin 2 Meter to the white wire from the **BLUE** 4 Pin Coin Mechanism.



#6 Programming

Step #1 – Turn on the machine.

Step #2 – Set the below screens:

Credit Set: 1 Credit = 2 Coin

Coin Per Bill: 1 Bill = 1 Coin

Credit Limit: Max Credit = 20



#7 – Replace the front of machine Trunking Strip



#8 Attach the meters

Step #1 – Cover the original machine meter with tape to avoid confusion.

Step #2 – Mount the two new meters as per the below photo.



#8 Test and ensure meters count correctly.

#9 Set payout and advise Kiwikrane

Step #1 – Adjust the payout to 27.5%. (See below for reason)

Step #2 – Notify Kiwikrane of the two new meter readings.

NOTE: The Superstar NAYAX reader will be set up for \$0.87. The reason for this is to account for 6 pulses for \$5.00.